


电容起动单相异步电动机 Capacitor-start

single-phase induction motor

机座号 Frame size	安装尺寸 (Mounting dimension)									B5 安装方式 Mounting dimension for B5(V1\V3)					B14 安装方式 Mounting Dimension for B14(V18\V19)					外形尺寸 Overall dimension				
	A	B	C	D	E	F	G	H	K	M	N	P	S	T	M	N	P	S	T	AB	AC	AD	HD	L
	71	112	90	45	14	30	5	11	71	7	130	110	160	10	3	85	70	105	M6	2.5	145	145	140	180
80	125	100	50	19	40	6	15.5	80	10	165	130	200	12	3.5	100	80	120	M6	3	160	165	150	200	295
90S	140	100	56	24	50	8	20	90	10	165	130	200	12	3.5	115	95	140	M8	3	180	185	160	240	310
90L	140	125	56	24	50	8	20	90	10	165	130	200	12	3.5	115	95	140	M8	3	180	185	160	240	335

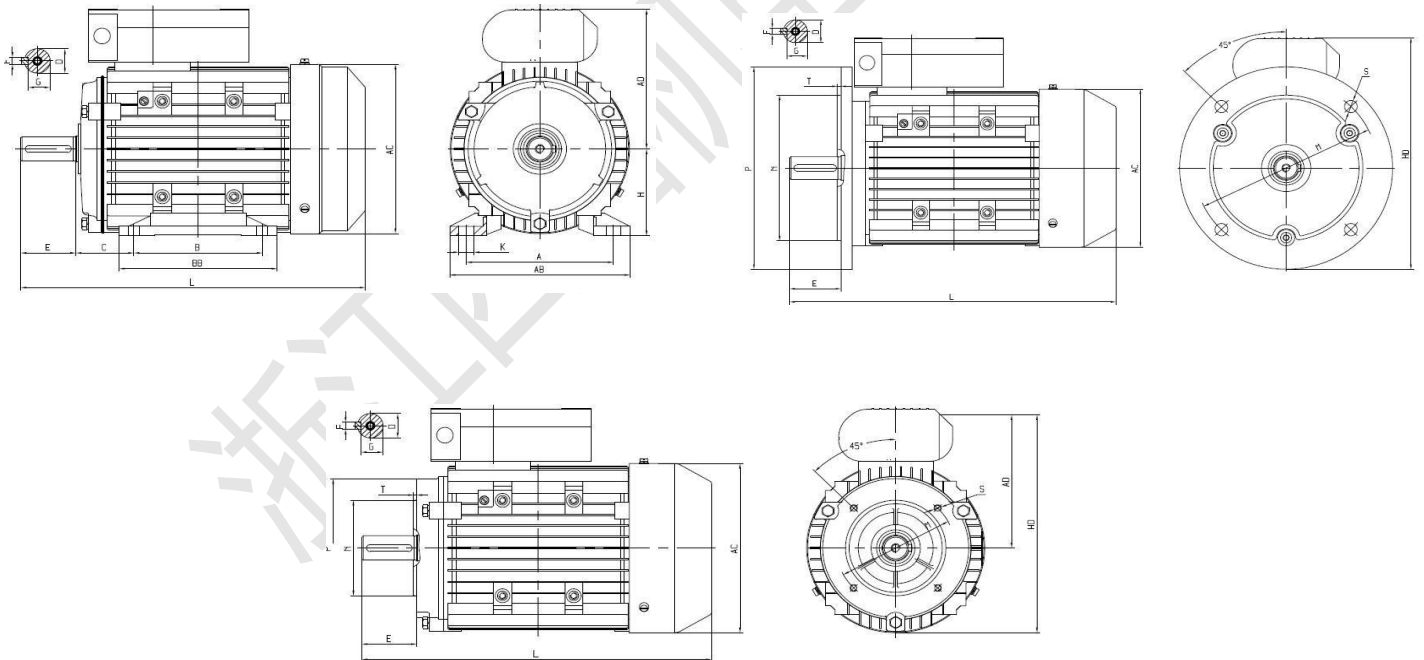

电容运转单相异步电动机 Capacitor running single-phase induction motor

型号 TYPE	功率 Output (Kw)	电压 Voltage (V)	频率 Frequency (Hz)	电流 Amps (A)	转速 Speed (r/min)	效率 EFF. (%)	功率因数 P.F.	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流 IS (A)
631-2	0.18	220	50	1.37	2800	65.0	0.92	0.40	1.7	5
632-2	0.25	220	50	1.87	2800	66.0	0.92	0.40	1.7	7
711-2	0.37	220	50	2.73	2800	67.0	0.92	0.35	1.7	10
712-2	0.55	220	50	3.88	2800	70.0	0.92	0.35	1.7	15
801-2	0.75	220	50	5.15	2800	72.0	0.92	0.33	1.7	20
802-2	1.1	220	50	7.02	2800	75.0	0.95	0.33	1.7	30
90S-2	1.5	220	50	9.44	2800	76.0	0.95	0.30	1.7	45
90L-2	2.2	220	50	13.7	2800	77.0	0.95	0.30	1.7	65
631-4	0.12	220	50	1.06	1400	57.0	0.90	0.40	1.7	3.5
632-4	0.18	220	50	1.54	1400	59.0	0.90	0.40	1.7	5
711-4	0.25	220	50	2.02	1400	61.0	0.92	0.35	1.7	7
712-4	0.37	220	50	2.95	1400	62.0	0.92	0.35	1.7	10
801-4	0.55	220	50	4.25	1400	64.0	0.92	0.35	1.7	15
802-4	0.75	220	50	5.45	1400	68.0	0.92	0.32	1.7	20
90S-4	1.1	220	50	7.41	1400	71.0	0.95	0.32	1.7	30
90L-4	1.5	220	50	9.83	1400	73.0	0.95	0.30	1.7	45

双值电容单相异步电动机 Two capacitor single-phase induction motor

型号 TYPE	功率 Output (Kw)	电压 Voltage (V)	频率 Frequency (Hz)	电流 Amps (A)	转速 Speed (r/min)	效率 EFF. (%)	功率因数 P.F.	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 IS/In
801-2	0.75	220	50	4.98	2800	72.0	0.95	1.8	1.8	5.5
802-2	1.1	220	50	7.11	2800	74.0	0.95	1.8	1.8	5.5
90S-2	1.5	220	50	9.57	2800	75.0	0.95	1.8	1.8	5.5
90L-2	2.2	220	50	13.9	2800	76.0	0.95	1.7	1.7	5.5
100L-2	3	220	50	18.4	2800	78.0	0.95	1.7	1.7	6
801-4	0.55	220	50	4.00	1400	68.0	0.92	1.7	1.7	5
802-4	0.75	220	50	5.13	1400	70.0	0.95	1.7	1.7	5
90S-4	1.1	220	50	7.41	1400	71.0	0.95	1.7	1.7	5
90L-4	1.5	220	50	9.83	1400	73.0	0.95	1.7	1.7	5

电容起动单相异步电动机 Capacitor-start single-phase induction motor

型号 TYPE	功率 Output (Kw)	电压 Voltage (V)	频率 Frequency (Hz)	电流 Amps (A)	转速 Speed (r/min)	效率 EFF. (%)	功率因数 P.F.	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流 Is (A)
711-2	0.18	220	50	1.89	2800	60.0	0.72	3.0	1.8	12
712-2	0.25	220	50	2.40	2800	64.0	0.74	3.0	1.8	15
801-2	0.37	220	50	3.36	2800	65.0	0.77	2.8	1.8	21

802-2	0.55	220	50	4.65	2800	68.0	0.79	2.8	1.8	29
90S-2	0.75	220	50	6.09	2800	70.0	0.80	2.5	1.8	37
90L-2	1.1	220	50	8.68	2800	72.0	0.80	2.5	1.8	60
711-4	0.12	220	50	1.88	1400	50.0	0.58	3.0	1.8	9
712-4	0.18	220	50	2.49	1400	53.0	0.62	2.8	1.8	12
801-4	0.25	220	50	3.11	1400	58.0	0.63	2.8	1.8	15
802-4	0.37	220	50	4.24	1400	62.0	0.64	2.5	1.8	21
90S-4	0.55	220	50	5.49	1400	66.0	0.69	2.5	1.8	29
90L-4	0.75	220	50	6.87	1400	68.0	0.73	2.5	1.8	37

浙江四福机电有限公司